



ASSA ABLOY

KR Series Key in Knob



Contents

Features and Specifications	3
Lock Functionality	4
Key in Knob Accessories	5
Specification Service	6
Product Maintenance	6

KR Series Key in Knob

Application

A range of cylindrical locksets suitable for residential applications such as apartments and houses.

Features and Specifications

KR Series - One spherical knob design.

Backset

60mm - 70mm adjustable latch.

Latch Bolts

Zinc latch bolt;
12.5mm throw.

Cylinder / Keying

Standard PD type 6 pin cylinder;
C4 profile with two keys.

Door Thickness

Suits door thickness 32-46mm.

Finishes

Standard finish satin stainless steel.

Strike

D Strike with anti-rattle tab as standard.

Handing

Suitable for left and right handed doors.

Functions

- Entrance set
- Passage set
- Privacy set
- Classroom
- Storeroom

Cleaning

Care should be taken during construction/ refurbishment to ensure that paint, thinners, mortar or cement splashes are carefully removed from locks, furniture and hardware. Removal of these splashes with strong cleaning agents or scourers should be avoided.


Dirt and grime should be regularly removed with a soft damp cloth. A solution of mild soap and water may be required. During cleaning, care should be taken to prevent cleaning solution from entering the cylinder keyway. Surfaces should be dried and possibly lubricated.



Fire Rating

Lockwood KR Series Key in Knob cylindrical locksets have been successfully tested up to 2 hours on fire door assemblies in accordance with Australian Standards AS-1905 Part 1, fire resistant door sets.

Dimensions

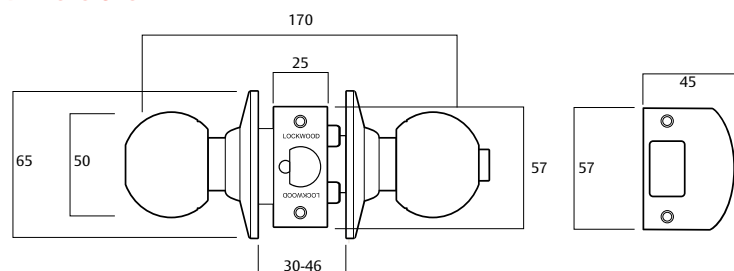

Specification Service

For all architectural hardware specification assistance refer to your local ASSA ABLOY Sales Office.

A fully comprehensive, obligation free, architectural door hardware specification can be prepared by architectural hardware representatives.


KR Series Key in Knob



Lockwood Symmetry 7020

Entrance Set

Article No: 150000-07020-630
Finish: SSS - Satin Stainless Steel
Model No: KR100
Description: KR100 Lockwood
Cylindrical Key Knob -
Entrance Lockset SSS

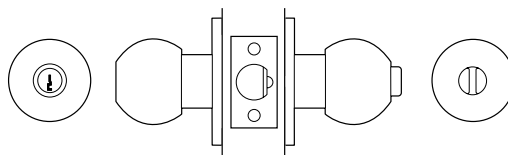

Outside

Opened by knob when unlocked.
Key unlocks exterior knob.

Inside


Opened by knob at all times.
Pushbutton locks exterior knob.

KR Series

Key in Knob

Passage Set

Article No: 150000-07021-630
 Finish: SSS - Satin Stainless Steel
 Model No: KR110
 Description: KR110 Lockwood
 Cylindrical Key Knob -
 Passage Latchset SSS

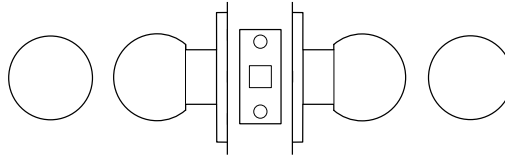

Outside


Opened by knob at all times.

Inside

Opened by knob at all times.

Privacy Set

Article No: 150000-07022-630
 Finish: SSS - Satin Stainless Steel
 Model No: KR120
 Description: KR120 Lockwood
 Cylindrical Key Knob -
 Privacy Lockset SSS

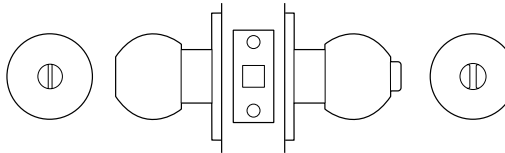

Outside

Opened by knob when free. Coin or screwdriver in emergency button unlocks both knobs.


**Includes anti-lockout function*

Inside

Opened by knob when free. Push button locks exterior knob.

Classroom Deadlatch

Article No: 150000-07026-630
 Finish: SSS - Satin Stainless Steel
 Model No: KR160
 Description: KR160 Lockwood
 Cylindrical Key Knob -
 Classroom Lockset SSS

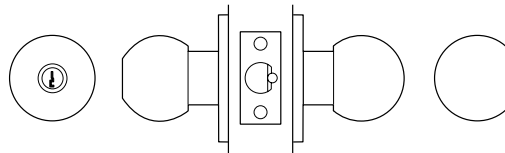

Outside


Opened by knob when free. Key locks or unlocks exterior knob.

Inside

Opened by knob at all times.

Storeroom Deadlatch

Article No: 1150000-07028-630
 Finish: SSS - Satin Stainless Steel
 Model No: KR180
 Description: KR180 Lockwood
 Cylindrical Key Knob -
 Storeroom Lockset SSS

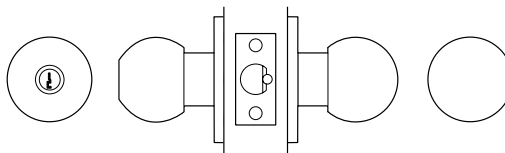


Outside

Opened by key only. Outside knob is rigid at all times.

Inside

Opened by knob at all times.



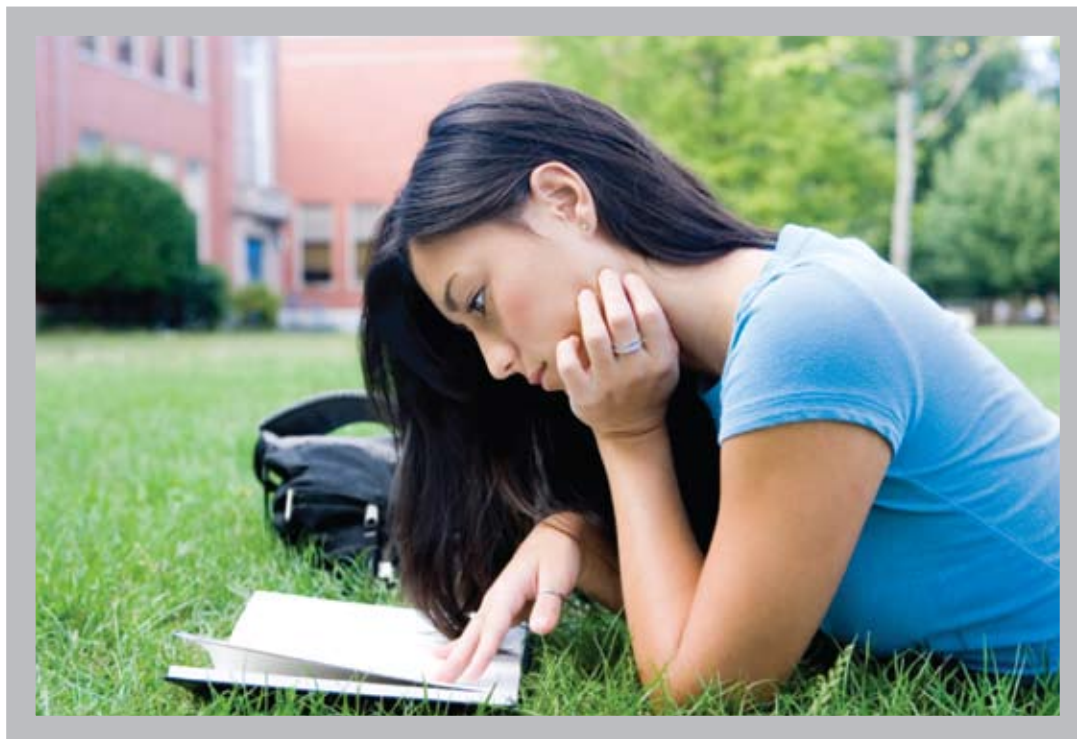

Specification Service

For all architectural hardware specification assistance refer to your local ASSA ABLOY Sales Office.

A fully comprehensive, obligation free, architectural door hardware specification can be prepared by architectural hardware representatives.

Cleaning

Care should be taken during construction/ refurbishment to ensure that paint, thinners, mortar or cement splashes are carefully removed from locks, furniture and hardware. Removal of these splashes with strong cleaning agents or scourers should be avoided.

Dirt and grime should be regularly removed with a soft damp cloth. A solution of mild soap and water may be required. Surfaces should be dried.

Disclaimer

Whilst every effort has been made to ensure that the information contained in this catalogue is accurate at the time of publication, ASSA ABLOY recommends that you consult ASSA ABLOY or its agents prior to placing an order to ascertain current information on specific products, as ASSA ABLOY reserves the right to make changes without notice. ASSA ABLOY will not be liable for any injury, loss or damage whatsoever, arising from any errors or omissions in the information contained in the catalogue or arising from the use or application of the information contained herein. This catalogue does not constitute an offer for the sale of any particular product.



ASSA ABLOY

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.

lockwoodasia.com

ASSA ABLOY Singapore

152 Ubi Avenue 4,
03-02 Armorcoat
Technologies Building,
Singapore 408826

Telephone +65 6880 0000
Facsimile +65 6880 0500

ASSA ABLOY Philippines

15/F Unit 1505
World Trade Exchange Building
215 Juan Luna Street
Binondo, Manila,
Philippines 1006

Telephone +632 2442 890
Facsimile +632 2442 889

ASSA ABLOY Thailand

5th Floor, 1919
Preecha Group Building,
Pattanakarn Road,
Suanluang, Suanluang,
Bangkok 10250,
Thailand

Telephone +66 2 722 7371
Facsimile +66 2 7227375

Middle East

P.O Box 283280,
Dubai
United Arab Emirates

Telephone +971 (0) 50 714 0751
Facsimile +971 (0) 4 421 7349

ASSA ABLOY Malaysia

No. 14 Jalan Wan Kadir 1,
Taman Tun Dr.
Ismail, 60000
Kuala Lumpur,
Malaysia

Telephone +60 3 7725 3888
Facsimile +60 3 7725 8333

Export Enquiries

ASSA ABLOY Australia
Export Department
235 Huntingdale Road
Oakleigh, Victoria, 3166
Australia

Telephone +61 3 8574 3888
Facsimilie +61 3 8574 3788

ASSA ABLOY India

B-206, 2nd Floor
Universal Business Park
Off Saki Vihar Road
Kamani Oil Mills Road
Andheri (East) Mumbai
India 400072

Telephone +91 22 40051380
Facsimile +91 22 40051383